
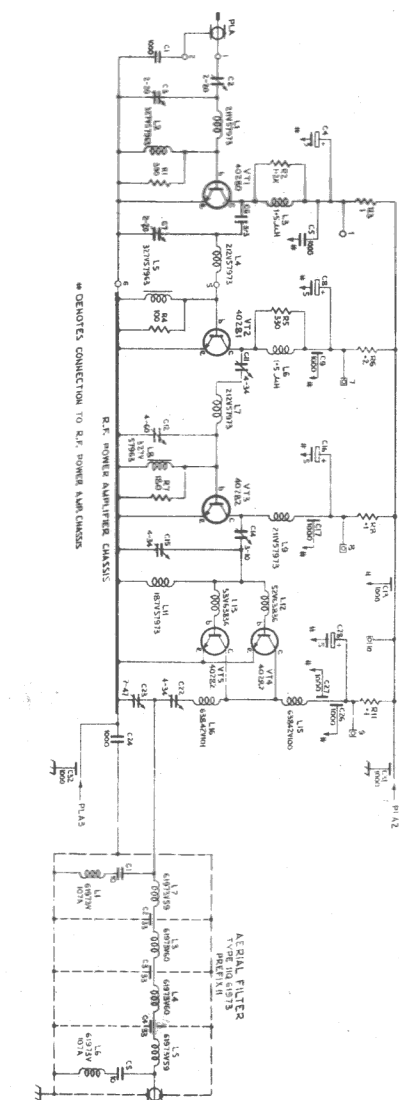


- NOTES:
1. CIRCUIT AS DRAWN IS FOR LABROR HAND OPERATION.
 2. FOR SINGLE BAND OPERATION LINK PINS 10-19 ON MEASURING BOARD.
 3. FOR WIDE CHANNEL OPERATION LINK PINS 1-10 ON DRIVERS BOARD.
 4. FOR THREE CHANNEL OPERATION ADD CRYSTAL SWITCHING MODULE TYPE B7B35 AS INDICATED.
 5. MEASURE SCRS AND CHANNEL 3712 TO 470 A, TENSURE C.A.
 6. LINKS NOT USED INDICATED WITH RESPECT TO CHANNEL NEGATIVE
 7. 5.0 VOLTAGES MEASURED WHEN 5742E QUIESCENT OR UNDERVOLTAGE



SOLID STATE F.M. TRANSMITTER
156-174 MHz
TYPE 3J63842 SINGLE CHANNEL
6J63842 THREE CHANNEL
ORC.63842 H3